




LEAPTON
SOLAR



■ ■ ■ SWITCH YOUR LIFE
ENERGY STORAGE SOLUTIONS

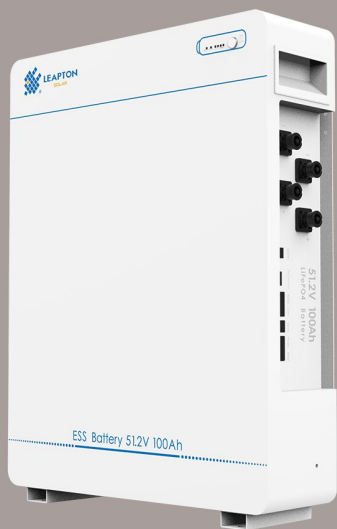

LOW VOLTAGE BATTERY EL-A05



PERFECT COMPATIBILITY

Suitable for 1 and 3 phase, hybrid and retrofit inverters



SAFE & RELIABLE

Reliable LFP battery cell with high cycle stability



CYCLE LIFE

≥ 6000 cycles



FLEXIBLE INVESTMENT

5kWh Modular Design, Flexibility Configuration-Max. 8 cluster in parallel



EASY INSTALLATION

standard modules, mix old and new batteries



HIGH EFFICIENCY

Charge and discharge with high efficiency



■ Headquarters: Leapton Energy Co., Ltd. ☎ 81-78-382-3182
📍 F6 Tosei Building 1-2-1 Aioicho Chuo-ku, Kobe-shi, Hyogo-ken 650-0025, Japan

■ Factory: Leapton Solar (Changshu) Co., Ltd. ☎ 86-512-88800068
📍 No.9 Sunshine Avenue, Changshu, Suzhou city, Jiangsu province, 215500, P. R. China

🌐 www.leaptonpv.com ✉ info@leaptonenergy.com



TECHNICAL PARAMETERS

Battery Module	EL-A05
Rated Energy(kWh) ¹	5.12
Usable Energy (kWh) ¹	4.6
Battery Module Energy	5.12kWh
Cell Type	LFP (LiFePO ₄)
Cell Configuration	16S1P
Rated Capacity(Ah)	100
Nominal Voltage (V)	51.2
Operating Voltage Range (V)	40~57.6
Recommend Voltage Range (V)	44.8~56.8
Recommend Charge/ Discharge Current (A)	50
Recommend Charge/ Discharge Power (kW)	2.56
Max. Charging/ Discharging Current (A) ²	100
Max. Charging/ Discharging Power (kW) ²	5.12
Weight (kg)	45
Dimensions (W × H × D mm)	454*585*135
Communication	RS485,RS232,CAN
Operating Temperature (°C)	Charge: 0 ~ +50; Discharge: -20 ~ +50
Operating Temperature (Recommended) (°C)	15~30
Relative Humidity	5%~95%
Cycle Life	>6000 (25°C @ 77°F)
Recommend DOD	90%
Environment	Indoor
Cooling	Natural convection
Ingress Protection Rating	IP20
Max. Operating Altitude (m)	2000
Mounting Method	Floor stand
Certificates	CE, IEC62619, UN38.3
Product Warranty	5 years warranty / 10 years warranty optional

Note

1. Value for Battery Cell Only (Depth of Discharge 90%).Actual usable energy at the AC output may vary by condition, such as the battery converter. inverter efficiency and temperature.

2. Leapton Energy recommends 50A@2.5kW for maximum battery module lifetime Max dis-/charge current and power derating wil occur related to temperature and SOC.